

Pioneer *sound.vision.soul*

Pioneer
PRO DJ

VSW-1

The Video Switcher for DJs



The **NEW** VSW-1 video switcher gives top DVJs the flexibility they need to take full advantage of Pioneer's revolutionary DVJ-X1

VSW-1 Video Switcher

VSW-1

Video Switcher

The VSW-1 is simple in its design and extremely easy to use, ensuring that DVJs are able to mix audio/video content from separate sources without relying upon multiple independent devices or needing another artist in the DJ booth. The VSW-1 gives performers more freedom in the mix because they can automatically switch video sources (by pressing the red "Auto" button) when using the familiar

Fader Start capability found in all of Pioneer's Pro DJ mixers.


DVJs can also switch manually between video sources, simply by selecting either of the two large buttons (A or B) on the face of the unit. The appropriate button lights up once it has been selected.

This video switcher accepts multiple video connections (component, composite and

S-Video) in both PAL and NTSC formats, although it does not convert from one format or connection type to another for output. A Video Sync connection to the DVJ-X1 delivers a professional, flicker-free video source transition.

The VSW-1 is the world's first video switcher specifically designed for the new breed of DVJs who want to explore their creativity with the amazing DVJ-X1.

Example of System Configuration with the DVJ-X1

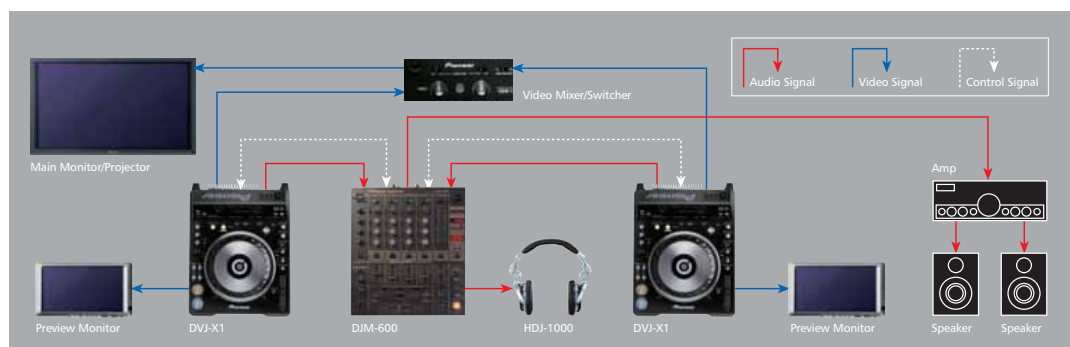

Specifications

General

Power	AC110-120V/220-240V
Power consumption	9W
Operating temperature	+41°F to +95°F
Storage temperature	-40°F to +140°F
Operating humidity	5-85 % R.H. (without precipitation)
Weight	3.08 lb
External dimensions	9.8 (W) x 3.5 (D) x 3.4 (H) inches

Video input section (input level/impedance)

Component video	BNC connectors x 3 (2 systems)	
	Y	1 Vp-p / 75 Ω
	CB/PB	0.7 Vp-p / 75 Ω
S-Video	S connector (2 systems)	
	Y	1 Vp-p / 75 Ω
	C	0.286 Vp-p / 75 Ω
Composite video	RCA connector (2 systems) 1 Vp-p / 75 Ω	

Video output section (output level/impedance)

Component video	BNC connectors x 3 (1 system)	
	Y	1 Vp-p / 75 Ω
	CB/PB	0.7 Vp-p / 75 Ω
S-Video	S connector (1 system)	
	Y	1 Vp-p / 75 Ω
	C	0.286 Vp-p / 75 Ω
Composite video	RCA connector (1 system) 1 Vp-p / 75 Ω	

Sync signal output section

Sync output	BNC connector (2 systems) 1 Vp-p / 75 Ω
Supported video modulation systems	NTSC/PAL

Other connectors

Control input	minijack (3.5 dia) 2 systems
Control output	minijack (3.5 dia) 2 systems



PIONEER EUROPE N.V

Multimedia Division, Slough SL2 4QP, UK
 TEL +44 (0) 1753 789789
 FAX +44 (0) 1753 789880
 www.djsounds.com

Products offered for sale may differ from those described or illustrated in this brochure due to later production changes in specifications, components or place of manufacture. The contents of this general brochure are therefore not to be treated as representations as to the current availability of products as described. All products in this catalogue are not necessarily available in your country.

http://www.djsounds.com